



VITESS.4000 padlock 86TI/45 with half cylinder

SKU AB.V4000.VH. 86Ti45.HZ
Producer No. VH86Ti45.V4L452

The Vitess system combines legal copy protection (patent term until 2034), unlimited trademark protection with high technical copy protection. It has been further developed on the basis of the proven V14 system.

The integrated Intop system, a special test unit in the cylinder and on the key, as well as the multiple paracentric contour profile also guarantee effective protection against tampering with the cylinder and illegal key copies. In addition, the Vitess system can be expanded at any time and leaves you free to make changes at a later date.

The Vitess.4000 system offers tailor-made security solutions for individual applications ranging from individual locks to complex systems.

Measurements

- standard shackle height: 32,5 mm
- shackle: Ø 8 mm
- case width: 46,5 mm
- length half cylinder: 30,5/10 mm

Technical characteristics

- third system level in Vitess
- Intop system for high technical copy protection
- conventional 6-pin locking system
- 6 spring-loaded locking elements and up to 4 spring-loaded coding pins on 2 locking rows
- coded profile rib with profile sensing pin
- angled paracentric precision contour (picking protection)
- standard drilling protection BS01 made of hardened special steel
- 14 mm core diameter
- according to DIN 18252 and DIN EN 1303, certified according to ISO 9001:2008
- can be combined with Vitess.1000

Execution

- massive lock body made of TITALIUM™, special aluminium - high security at low weight
- cylinder body: nickel plated brass
- stable key with vertical, easy key insertion
- with hardened steel shackle with special NANO protect coating for very high corrosion protection
- key can only be removed when closed, positively locked by locking path
- double U-lock
- combination with electronic systems possible at any time

Options / Special equipment


- different shackle height (39,5 mm = 86TI/55)
- 86TI/55: forced closing or automatic locking (depending on the position of the closing cam)
- 86TI/55: forced closure with 45° position of cam, automatic locking with 25° position of cam
- increased drilling protection with SKG*** certificate *
- weather protection *

Operational area

- indoor, conditionally for outdoor usage
- garden gates, steel and lattice gates
- protection of larger values / objects or with a high risk of theft
- for securing chains, doors, gates, cupboards, lockers, toolboxes, basement windows, sheds, switchgear etc.


Scope of delivery

- padlock 86TI/45 with half cylinder Vitess.4000 incl. 3 or more keys
- Security card

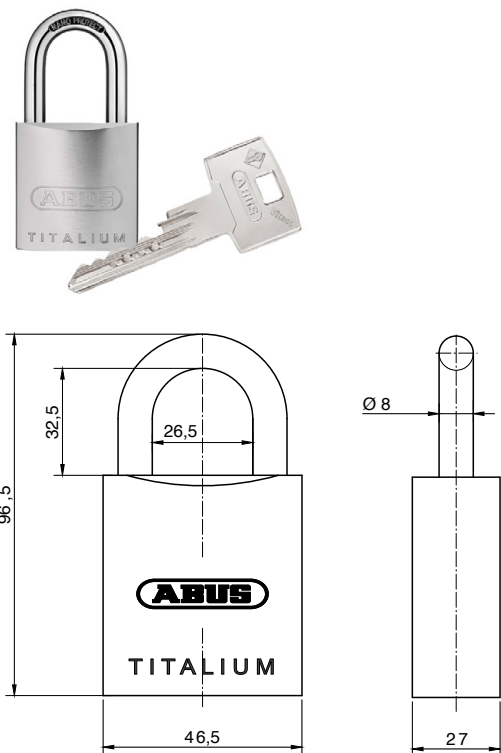


Key

- key thickness: 2,6 mm
- stable serrated key made of wear-resistant nickel silver
- highest key copy protection through Intop system
- plastic key caps (COMBICAP, SKUNI and SKKR)
- on request with integrated transponder for the control of electronic systems (compatible only with COMBICAP and SKUNI key, later retrofitting only with COMBICAP)

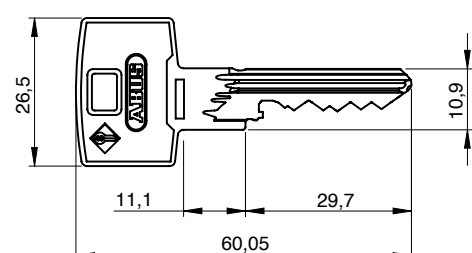


Key cap SKUNI

- key caps without transponder
- key caps made of plastic with metal reinforcement made of nickel silver
- for special design requirements for the keys
- for easy optical differentiation
- increased locking comfort due to enlarged key head
- subsequent opening of the key cap as well as retrofitting or replacement is not possible
- the key cap is mounted using an ultrasonic welding process, so factory assembly is absolutely necessary
- on request with integrated transponder to control external systems such as time recording, parking management systems or cashless accounting systems
- use exclusively with keys from ABUS Pfaffenhain
- combination with electronics

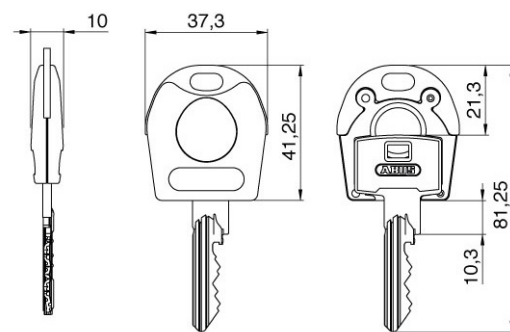

Key cap COMBICAP

- key caps without transponder
- retrofittable plastic key cap for all mechanical keys of ABUS locking systems (no factory installation)
- coloured and numbered key cap for easy optical differentiation of keys
- increased locking comfort due to enlarged key head
- COMBICAP enables the combination of mechanical and electronic cylinders in a locking system as well as the retrofitting of electronics
- transponder can be optionally integrated for the control of electronic systems such as time recording, parking management systems, alarm systems or cashless accounting systems
- integration of up to two transponders for different electronic functions, e.g. access control and payment function
- use exclusively with keys from ABUS Pfaffenhain
- combination with electronics

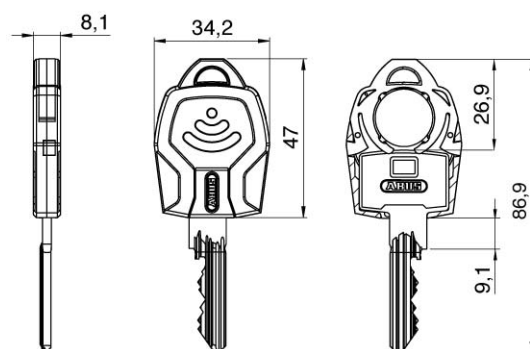

Combination with electronics


In an ABUS locking system, mechanical and electronic locking cylinders can be flexibly combined at any time - either directly ex works or later in retrofitting. This potential for expansion allows you maximum flexibility and future-proofing when planning your building security. With the combination keys you can lock mechanical and electronic cylinders with just one key. Alarm systems, external systems or time recording and payment terminals can be integrated into the locking system at any time.

Thanks to COMBICAP and SKUNI CAP, combination with electronic systems is very easy. The key can be supplied directly from the factory as a mechanical-electronic combination key. Later retrofitting of electronic components is only possible with the COMBICAP.

Technical details

The patented Intop system

The Intop system is a newly developed test unit on the key and in the cylinder, which prevents the locking process with an unauthorised key. In combination with the coded profile rib and the multiple paracentric precision profile, it offers you effective protection against illegal key copying and tampering with the door lock.

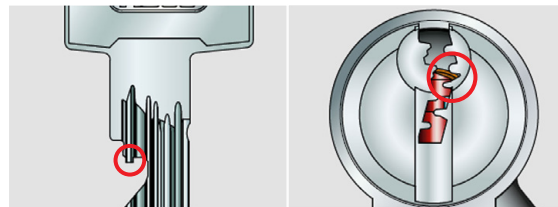

Intop system

Paracentric contour profile



Intop test unit on key and in cylinder


The material TITALIUM™

The TITALIUM™ padlocks from security expert ABUS represent a new dimension in security! Manufactured from an innovative material, they stand for high security with a greatly reduced weight. The material TITALIUM™ is based on a light aluminium special alloy, which shines with its strong robustness and lightness at the same time. The special steel shackle is coated with NANO PROTECT™ for very high corrosion protection.

Security options

Increased drilling protection BS01 (standard)


The drilling protection is achieved by using two additional hardened steel pins (the first and third pair of pins) in the cylinder core and body on each locking side (for double cylinders generally on both sides). This achieves the attack resistance class 2 according to EN 1303 and makes violent opening attempts more difficult.



Drilling protection BS01

Increased drilling protection with SKG*** certificate

The SKG*** certificate results from the use of four hardened steel pins in the cylinder body, as well as an additional four hardened steel pins in the cylinder core on each locking side. This certificate is used for special requirements on the attack resistance of the cylinders.

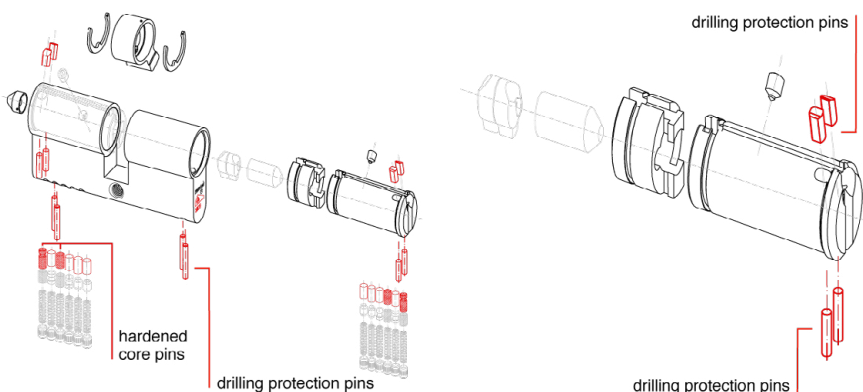

* this selection extends the delivery time