PRODUCT DATA SHEET

keyTec RPE double cylinder EXPRESS

SKU WINK.RPE.DZ.EXPRESS
Producer No. RPE 01


With the patented keyTec RPE system from WINKHAUS, sophisticated locking technology can now also be implemented flexibly and economically in private homes.

A new type of copy protection provides the certainty that only authorised persons can make a duplicate key. This is achieved by a specially shaped rib on the key, which is scanned in the locking cylinder by a locking ball (protectBall).

Basic length

- from 30,3/30,3 mm
- measured from the middle of cam
- extension 5 mm per side



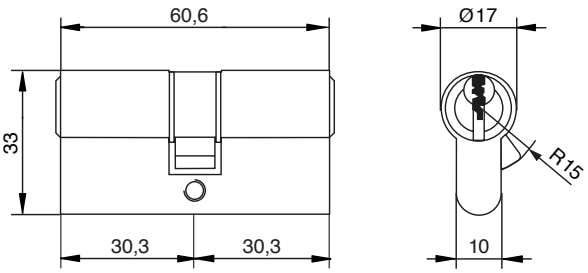

Technical characteristics


- 5 spring-loaded solid pin locking elements per side
- additionally up to 8 lateral springless controlled radial pins, which are scanned through bore recesses (calottes) on the key and thus improve scanning protection
- protection against drilling through hardened, stainless steel pins
- standard picking protection through special pins
- locking ball (protectBall) with rib check
- multiple paracentric key profiles for increased unlocking security
- core pins made of resistant hard bronze
- reinforced key insertion through special cylinder cores
- manufactured according to DIN 18252 and EN 1303
- patent protection until at least 2028

Execution

- conventional locking system
- vertical key insertion
- cylinder body: nickel plated
- one-piece locking cam made of sintered steel, non-toxic corrosion protection
- combination with electronic possible (mechatronic key or mechanical key with integrated transponder for the operation of electronic components such as electronic cylinders, access readers or electronic door fittings)

Key

- key thickness: 3 mm
- serrated key made of wear-resistant nickel silver
- ergonomically shaped key head for better grip
- 13,1 mm key shaft for the combination of all common safety fittings
- specially shaped key tip for less wear
- modern key design
- high-quality plastic cap in different colours for individual adjustment
- caps in 5 colours: black (standard), blue, yellow, green, red
- material thickness cap: 4,7 mm

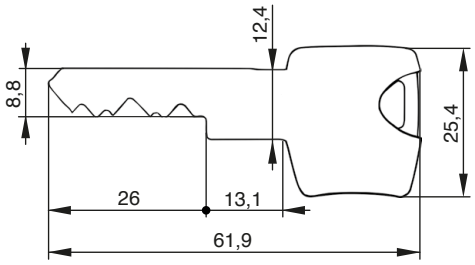

Options / Special equipment

- emergency and danger function (EE)

Operational area

- front doors, connecting doors, office doors, interior doors, exterior doors, apartment doors, gates, etc.
- interior and exterior areas, in connection with DIN mortise locks
- private homes, small-scale enterprises, shop premises

Scope of delivery

- double cylinder incl. 3 or more keys
- fixing screw
- security card

Terms of delivery

- production within 3 - 4 business days plus shipping
- up to max. 10 cylinders
- orders placed before 08:00 a.m. will be processed on the same business day (in case of advance payment the day of receipt of payment counts
- shipping approx 1 - 2 days via GLS (within Germany)

Technologiepark Freital F2
Döhlener Gewerbering 11
01705 Freital

Tel.: +49 351 850 71 000
Fax: +49 351 413 92 595

www.sullus.com
info@sullus.com