



keyTec X-tra half cylinder

SKU WINK.XTRA.HZ
Producer No. X-tra 02

The system combines the advantages of conventional „serrated keys“, such as a wide range of key profiles and a large number of variants, with the convenience of reversible key systems.

In addition to convenient operation, the variable locking surfaces with up to 20 spring-loaded radial pins and multiple stepped calotte bores, standard drilling and pulling protection and the special convex shape of the key ensure the high security of the X-tra reversible key system.

Basic length

- from 30,2/9,2 mm
- measured from the middle of cam
- extension in 5 mm steps

Technical characteristics

- up to 20 radially arranged locking pins in 4 rows per side
- standard drilling and pulling protection: on the outside additional carbide pins in the cylinder core and in the cylinder body
- picking protection
- high manipulation protection
- modular cylinder design for subsequent length change
- reinforced key insertion through special cylinder cores
- manufactured according to DIN 18252 and EN 1303
- patent protection until 2025

Execution

- reversible key system
- comfortable vertical key insertion
- cylinder body: nickel plated brass
- one-piece cam made of sintered steel, non-toxic corrosion protection
- cam adjustable in 8 positions
- combination with electronics possible (mechatronic key or mechanical key with integrated transponder for the operation of electronic components double knob cylinder, access reader, door fitting)

Options / Special equipment


- different cylinder finishes *
- key caps

Operational area

- front doors, connecting doors, office doors, interior doors, exterior doors, apartment doors, gates, etc.
- mortise locks, garage door locks, key switches


Scope of delivery

- half cylinder incl. 3 or more keys
- fixing screw
- Security card

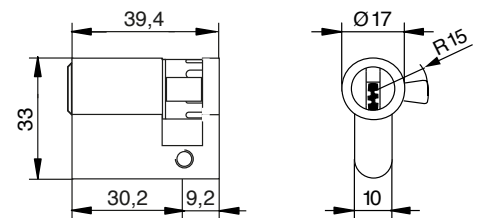

Key

- key thickness: 3,4 mm
- comfortable reversible key
- increased wear resistance due to nickel silver material
- ergonomically shaped key head for better grip
- 13,5 mm key shaft for the combination of all common safety fittings
- variable longitudinal profiles prevent the insertion of unauthorised keys
- special key tip for better insertion comfort
- key cap in different colours optionally available
- material thickness cap: 5,8 mm
- 5 intensive colours: blue, yellow, green, red, black

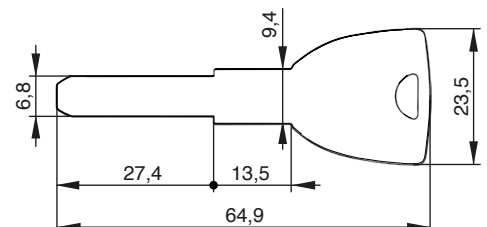

* this selection extends the delivery time